

TECHNICAL INFORMATION

ARMADURA ESTANQUES SIMPLES 150CM IP65

Armadura em policarbonato para instalação de tubos LED T8, proteção IP65 e várias medidas com Feixos Inox.

Polycarbonate Batten with IP65 protection for T8 Tube installation and various sizes with Inox Clips.


Armadura en policarbonato para la instalación de tubos LED T8, protección IP65 y varias medidas y Clips Inox.



ILAR-00264

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Led Type	-	Dimensions (L x W x H)	1575x95x100mm	Total Luminous Flux	-
Body Material	ABS + PC	Weight	-	Luminous Efficacy	-
Fixings	INOX Clips	Volume	-	Beam Angle	-
Housing Colour	White	Model	Single	Colour Temperature	-
Nominal Lifetime (EOL end of life)	-	PC / BOX	12	Colour Rendering Index	-
Dimmable	-			Colour Consistency	-
Base	G13				

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	-	Energy Label	-	CE	YES
Nominal Voltage	220-240V	Energy Consumption KWH/1000H	-	ROHS	YES
Operating Frequency	50/60Hz	Type of Protection	IP65	ENEC	-
Power Factor	-	Protection Class	Class I	Warranty	2 YEARS
Starting Time 100% ON	-	Proteccion Class IK (shock resistance)	IK08		
ON/OFF Cycles	-				
Work Temperature	-15°C to 40°C				

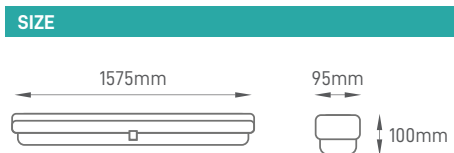

Designed by Aron Light in Portugal Made in PRC

