



05 Downlights Fixed>UGR19 Office Range

50130UV/W/V



30W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 750mA driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

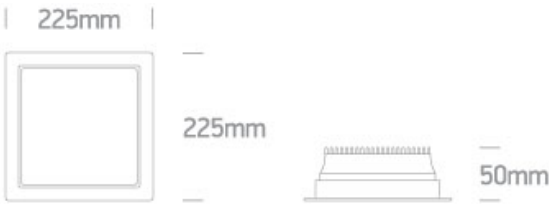

Gallery



Physical Specification

Item Group	05 Downlights Fixed
Family	UGR19 Office Range
Order Code	50130UV/W/V
Colour	White
Material	Die Cast
Shape	Rectangular
Length	225mm

Width	225mm
Height	50mm
Cutout Hole Width	205mm
Cutout Hole Length	205mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	750mA
Voltage	38V
Safety Class	
Power(Watts)	28,5W
IP Rating	IP44
Light Source	LED built in

LED Type
LED Brand
F Mark

SMD 2835
Epistar


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
750mA
IP Rating
Safety Class
Dimmable
Housing Material
Output Terminal
Brand
Protection

Led Driver
220-240V
Yes
Yes
24,75-30W
0,9
Yes
33-40V
IP44

No
Plastic
Cable
Lifud
Short Circuit and Overload

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Illumination Diagram
UGR

3000K-4000K-6000K
3300lm
110lm/W
90

19

Packing Info

Box Weight	1.180kg
Pcs/Carton	10
Barcode	5291889075202
HS Code	9405413990

Certification & Warranty

Warranty	3 years
----------	---------

switch to
one light!

