


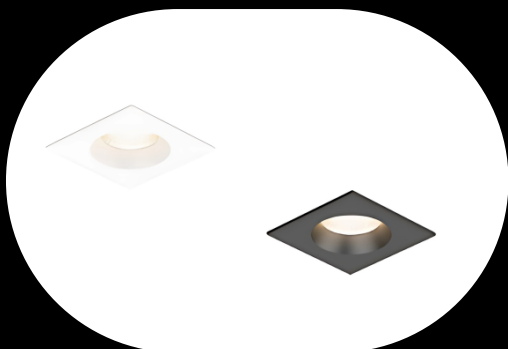

Key Information

Dimensions	80 x 80 x 30 mm	Cutout	Ø68 - 72 mm
	90 x 90 x 49 mm		Ø75 - 80 mm
	110 x 110 x 64 mm		Ø90 - 95 mm
Luminaire type	Downlight		
Mounting type	Recessed		

DATA SHEET

Compliance certificates	CE, ROHS, SAA
Colours	White, black
Light source type	LED
Construction material	Aluminium, PMMA
Protection rating (IP)	IP65
Protection class	II
Impact resistance	IK06
Operating temperature	-20°C ~45°C
Power	5W/8W/10W/13W
Luminous efficacy (lm/W)	100lm/W
Luminaire lumens (lm)	410-1350lm
LED lifepsan	50,000 hours
Colour Rendering Index (CRI)	>80Ra
Colour temperature (K)	CCT Switchable 2700/3000/4000/5000K
Dimming	On/Off, Triac, 0-10V
Smart / Connected luminaire	No
Beam angle (°)	36°/60°
MACADAM	-
LED Type (SMD, COB)	COB
RGB capability	No
UGR	-
Supply voltage (V)	AC220-240V

Application

