

TECHNICAL INFORMATION

BUG CCT 3W 12V

Design moderno, alumínio de fundição injetada, elevados níveis de proteção (IP66 e IK), forte resistência à corrosão.

Modern design, injected cast aluminum, high protection levels (IP66 and IK), strong corrosion resistance.



Diseño moderno, aluminio fundido inyectado, altos niveles de protección (IP66 e IK), fuerte resistencia a la corrosión.



ILAR-01731

REFERENCE		DIMENSION & WEIGHT		PHOTOMETRICAL DATA	
Body Material	Aluminum	Lenght	36mm	Total Luminous Flux	154lm
Housing Colour	Stainless Steel	Width	Ø42mm	Luminous Efficacy	-
Nominal Lifetime (EOL end of life)	-	Cut-out	Ø33-36mm	Beam Angle	36°
Surface / Recessed	Recessed	Packaging Unit	Carton Box 20 pcs	Colour Temperature	CCT 2700-6500K
Dimmable	Optional	Gross Weight	16kg	Colour Rendering Index	>80
		Volume	44 dm3		

ELECTRICAL AND OPERATING DATA		ENERGY LABEL & STANDARS		CERTIFICATIONS	
Nominal Wattage	3W	Energy Label	N/A	2014/30/EU (EMC Directive)	YES
Nominal Voltage	12V	Energy Consumption KWH/1000H	N/A	2014/35/EU (LVD Directive)	YES
Operating Frequency	-	Type of Protection	IP66	ROHS	YES
Operating Temperature	-10°C to + 40°C	Protection Class	Class II	Warranty	3 YEARS
Starting Time 100% ON	0.000s	Protection Class IK (shock resistance)	IK08		
ON/OFF Cycles	-				

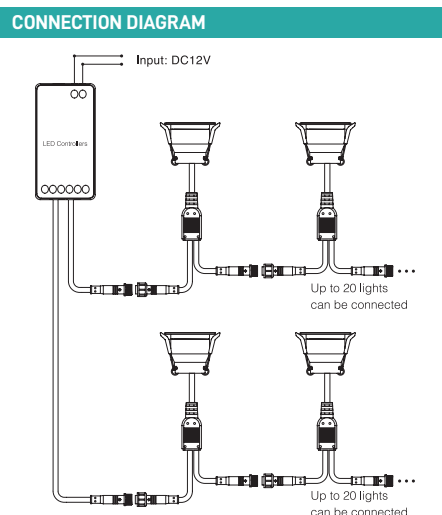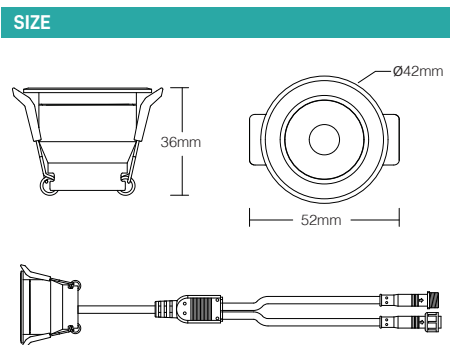

Designed by Aronlight in Portugal. Made in PRC

