


05 Downlights Fixed>The 40W Backlit Panel 600x600mm

50140B/W/C

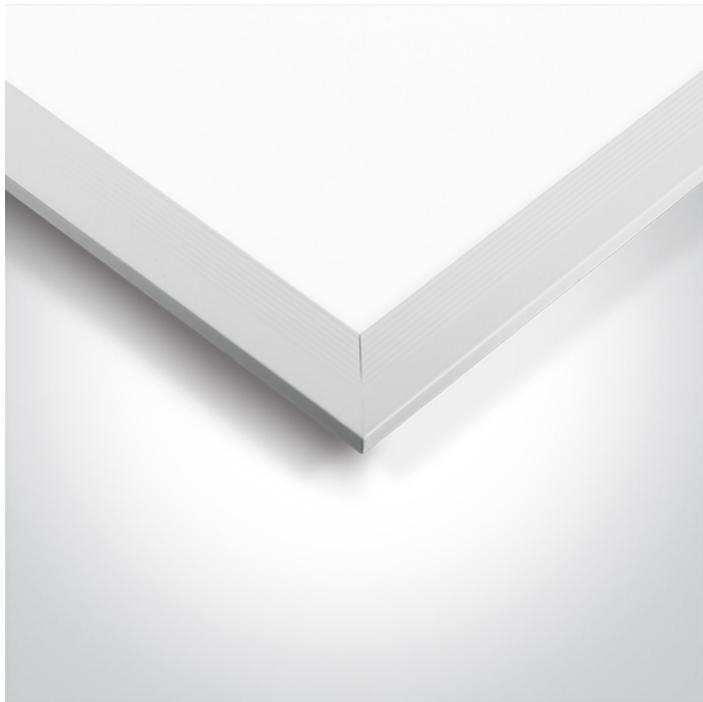

60x60 recessed backlit LED panel for T-rail false ceilings. Uniform lighting, ideal for commercial applications.

Complete with 850mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery



Related items



050017



050108



89044L

Physical Specification

Item Group

05 Downlights Fixed

Family

The 40W Backlit Panel 600x600mm

Order Code	50140B/W/C
Colour	White
Material	Aluminium + Steel
Shape	Rectangular
Length	595mm
Width	595mm
Height	29mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	<input type="checkbox"/>
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Light Source	LED built in
LED Type	SMD

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Constant Current	Yes
850mA	
Dimmable	No

Illumination Data

Colour Temperature	4000K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	2.300kg
Pcs/Carton	4
Barcode	5291889068334
HS Code	9405119090

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

